

Cellular Mast Emissions Survey: Mont Ube



Document details

Document name	Cellular Mast Emissions Survey: Mont Ube
Survey date	19-09-2023 at 11:51
Report issue date	27-09-2023
Survey engineer	Aleem Alvi
Report compiled by	Fatima Tuz Zehra
Checked and approved by	Bachir Belloul

©Freshwave Services Limited 2023. Confidential and Proprietary. This document and any information contained therein are intended for the use of employees and customers of Freshwave Services Limited only. No part of this document may be reproduced or transmitted to a third party in any form or means without the prior written consent of Freshwave Services Limited.

Contents page

1	Executive summary	3
2	Site details.....	4
2.1	Site location	4
2.2	Site description	4
2.3	Site photo.....	5
2.4	Test location.....	5
3	Survey results.....	6
3.1	800MHz band.....	6
3.2	900MHz band.....	7
3.3	1800MHz band.....	8
3.4	2100MHz band.....	9
3.5	2600MHz band.....	10

Lists of figures

Figure 1 – Map of the site area	4
Figure 2 – Location of the peak where emission levels were measured.....	5
Figure 3 – Survey area with spot measurement markers.....	5
Figure 4 – 800MHz band spectrum scan.....	6
Figure 5 – 900MHz band spectrum scan.....	7
Figure 6 – 1800MHz spectrum scan.....	8
Figure 7 – 2100MHz band spectrum scan.....	9
Figure 8 – 2600MHz band spectrum scan.....	10

List of tables

Table 1 – Cumulative exposure quotient.....	3
Table 2 – 800MHz band exposure quotient at Mont Ube	6
Table 3 – 900MHz band exposure quotient at Mont Ube	7
Table 4 – 1800MHz band exposure quotient at Mont Ube	8
Table 5 – 2100MHz band exposure quotient at Mont Ube	9
Table 6 – 2600MHz band exposure quotient at Mont Ube	10

1 Executive summary

The Jersey Competition and Regulatory Authority or JCRA regularly monitors emission levels from the cellular masts in Jersey¹ to ensure the mobile network operators who operate their services from those masts comply with their license obligations in terms of power levels and that the levels from the sites meet the internationally recognised standards and guidelines regarding health and safety limits for the public.

In 2017, JCRA commissioned EM emission level surveys at all the sites within the island. The surveys were repeated in each subsequent year for all new sites and sites where major changes were made by the operators in the previous year. This report presents the results of the survey conducted at the Mont Ube site in 2023.

The Mont Ube site was used by two operators at the time of the survey: Airtel and JT. Surveys were conducted at all cellular frequency bands (800, 900, 1800, 2100 and 2600MHz) for all mobile cellular technologies (GSM, 3G and 4G) and for all three cellular operators as a routine procedure. Even though the reported levels are expected to be predominantly emitted from this site, the test equipment does not discriminate between nearby sites which means that the levels are cumulated over all site emissions detected by the test instrument.

The survey established that the emission levels around the site were very low and well below the safety limits for the public advised by internationally recognised standards.

The values shown hereafter are the maximum levels recorded around the site following a peak search. The levels were found to be lower at all the other locations round this site. The recorded values are true at the time of testing and can go up or down depending on the level of user activity on the site.

The total Exposure Quotient (EQ) for the site recorded across all detected cellular frequency bands is given at the bottom of the summary table below. A total EQ close to 1 (one) for the site would mean that emission levels approach the safety limit advised by ICNIRP in their guidelines.

Table 1 – Cumulative exposure quotient

Site Name	Band [MHz]	Max E-field in band [V/m]	Operator at Max E-field	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	800	0.2415	JT	161	0.000321191	1/ 3113
	900	1.664	JT	25	0.0031402	1/ 318
	1800	0.1058	JT	551	2.89036E-05	1/ 34598
	2100	0.1846	JT	330	5.54825E-05	1/ 18024
	2600	0.05167	JT	1181	1.35263E-05	1/ 73930
Total Site EQ					0.003559303	1/ 281

The results show that the total EQ was measured at 1/281 and therefore remains below the ICNIRP guidelines.


The graphs which follow show the activity on all the frequency bands surveyed. The plots are colour-coded for easy identification of the three main operators: Airtel in red, Sure in dark blue, and Jersey Telecom in light blue. The graphs are also supported by the equivalent statistical figures derived from the measured levels at the site for added clarity.

¹ Prior to 1 July 2020, the JCRA and the Guernsey Competition & Regulatory Authority coordinated their activities in the Channel Islands as the Channel Islands Competition Regulatory Authorities (CICRA). Earlier reports may refer to CICRA rather than JCRA.

2 Site details

2.1 Site location

Figure 1 – Map of the site area

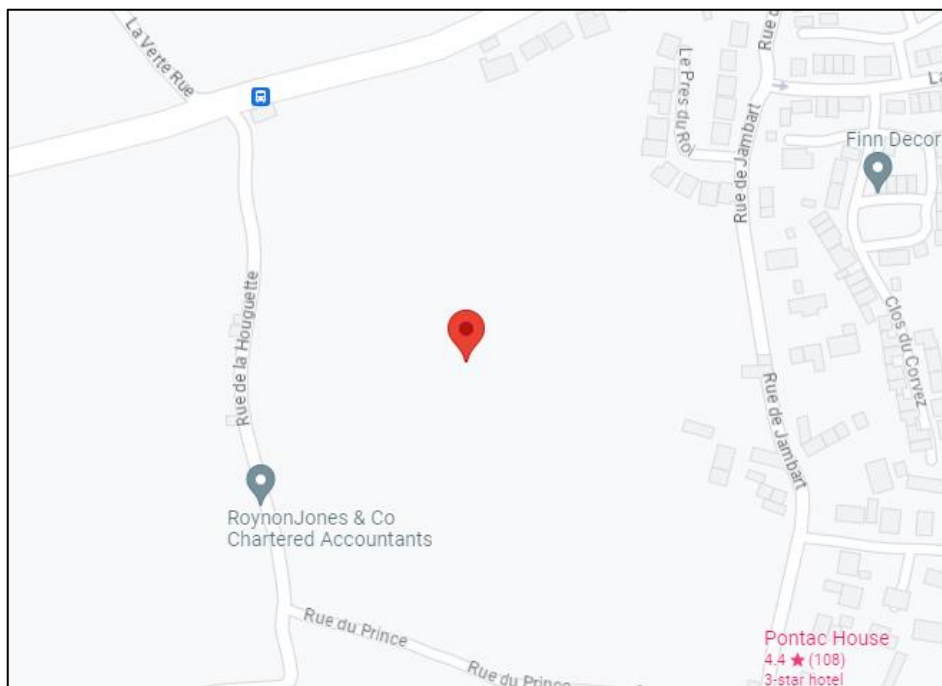

Site name:	Mont Ube
Site address:	Rue de la Houquette, St Clement, Jersey
Site latitude:	49.17135109
Site longitude:	-2.05848911

2.2 Site description

Operators:	Airtel, JT
Antenna types:	Omni-directional / Directional
Approximate height:	15m
Site type:	Monopoles
Description:	The antennas at Mont Ube are located at the corner of the field, within a fenced enclosure. The antennas are unreachable by public

2.3 Site photo

Figure 2 – Location of the peak where emission levels were measured.



2.4 Test location

Figure 3 – Survey area with spot measurement markers



The green circle is the antenna location(s), the yellow arrow boxes are intermediate locations measured at during the peak search and the red arrow box is the spot where the highest spot search reading was obtained and where the detailed survey was carried out.


As part of the peak search procedure, spot measurements were taken at locations around the antennas as shown on the above sketch. The reported spectrum scans were taken at the peak location (shown in red above) where the highest readings were recorded. The spectrum readings reported further down this report were recorded over a period of six minutes as advised by ICNIRP.

3 Survey results

3.1 800MHz band

The graph for the 800MHz activity is shown below with the E-field strength levels measured at the site plotted on a logarithmic scale.

Figure 4 – 800MHz band spectrum scan

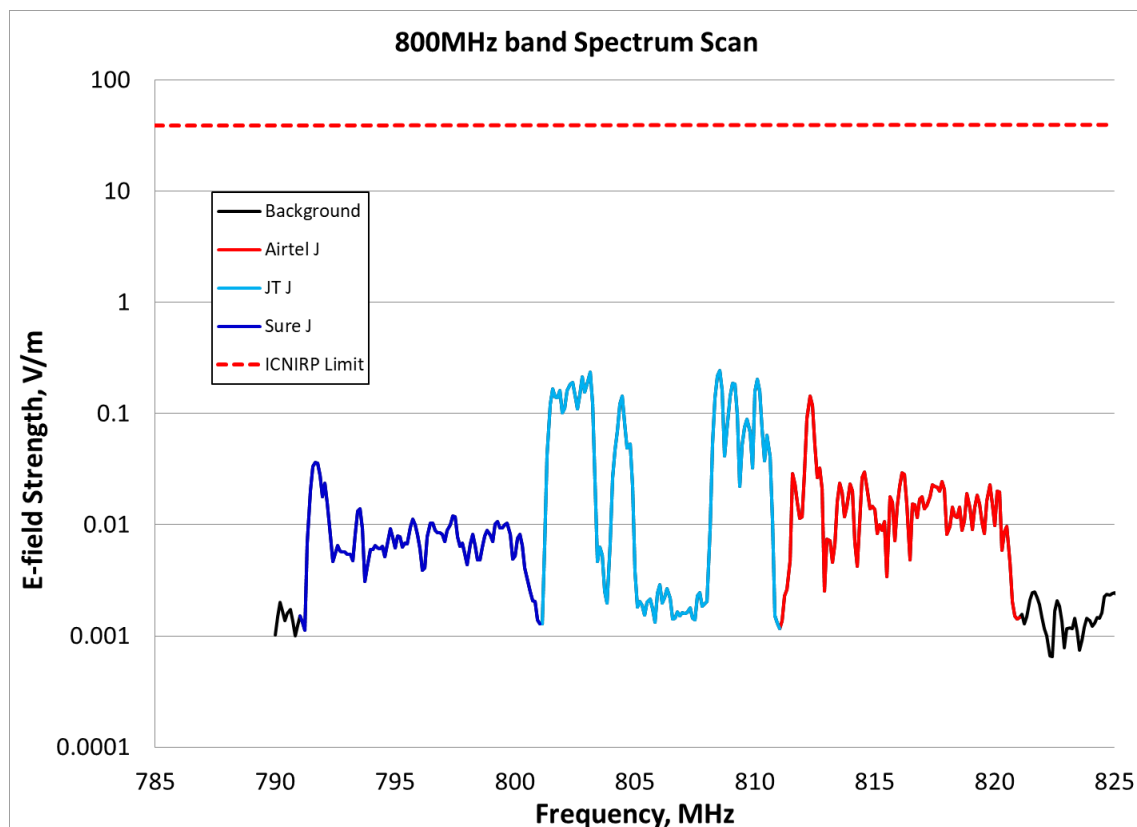

The red line on the scan represents the Airtel activity, the light blue is JT and the dark blue is Sure. ICNIRP's reference level for the *General Public* is also shown as the straight dashed line at the top of the graph. For clarity, each step on the vertical axis represents a 10-fold increase. The same scaling and colour scheme will be used throughout this report.

No field level recorded across the band was higher than 0.2415 V/m (JT), which is 161 times lower than the ICNIRP Guideline Reference Level.


Table 2 – 800MHz band exposure quotient at Mont Ube

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	Airtel	800	0.1422	273	2.234E-05	1/ 44763
	JT		0.2415	161	0.000295247	1/ 3387
	Sure		0.03607	1078	3.60414E-06	1/ 277459
total band EQ					0.000321191	1/ 3113

3.2 900MHz band

The graph for the 900MHz activity is shown below.

Figure 5 – 900MHz band spectrum scan

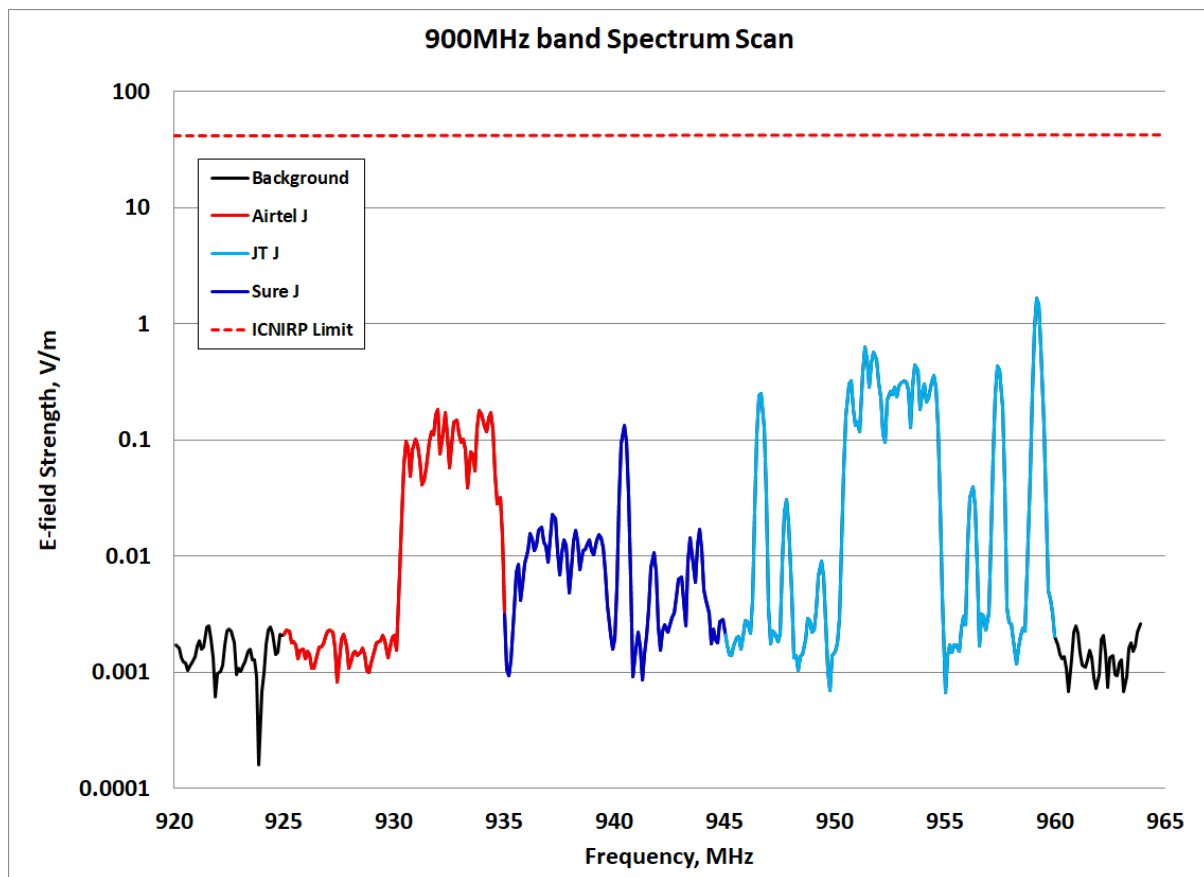

No field level recorded across the band was higher than 1.664 V/m (JT), which is 25 times smaller than the ICNIRP Guideline Reference Level.

The EQ results for the 900MHz band are shown below.


Table 3 – 900MHz band exposure quotient at Mont Ube

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	Airtel	900	0.1844	224	0.000143051	1/ 6991
	JT		1.664	25	0.002984318	1/ 335
	Sure		0.1338	308	1.28319E-05	1/ 77931
total band EQ					0.0031402	1/ 318

3.3 1800MHz band

The graph for the 1800MHz activity around the site is shown below.

Figure 6 – 1800MHz spectrum scan

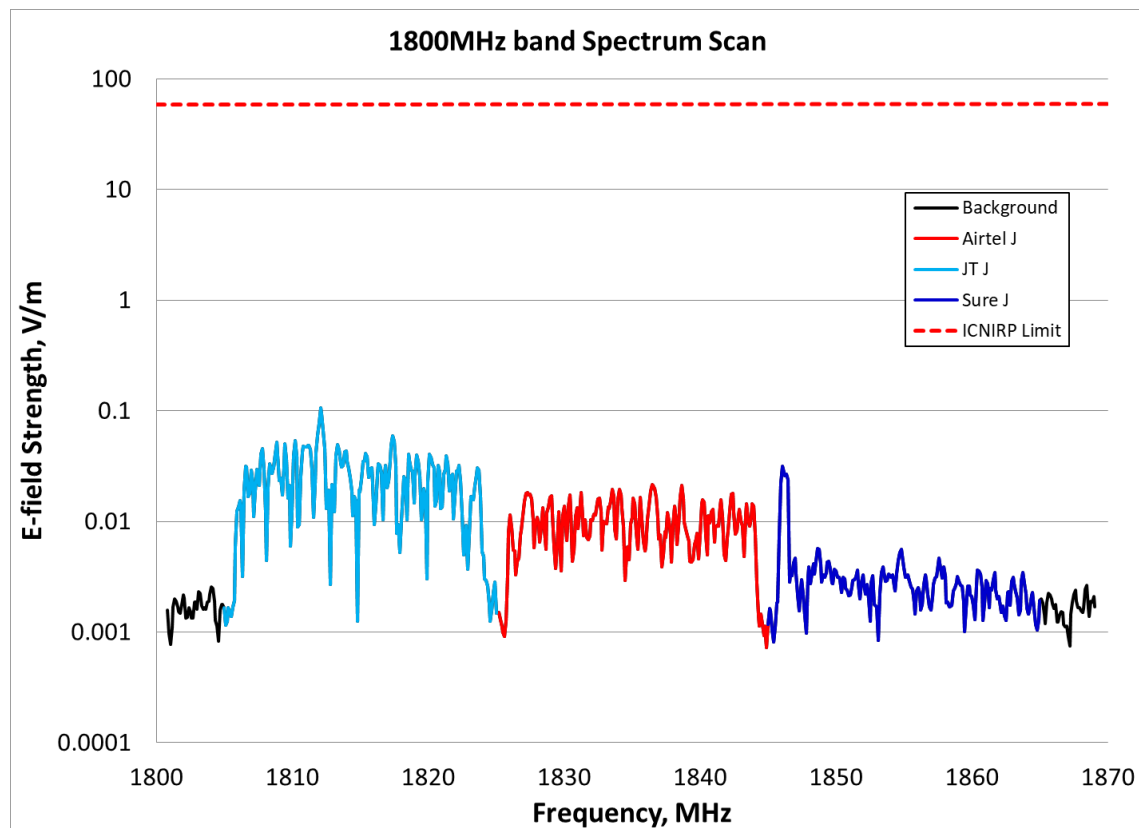

No field level recorded across the band was higher than 0.1058 V/m (JT), which is 551 times smaller than the ICNIRP Guideline Reference Level.

The EQ results for the 1800MHz band are shown below.


Table 4 – 1800MHz band exposure quotient at Mont Ube

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	Airtel	1800	0.02166	2693	3.26391E-06	1/ 306381
	JT		0.1058	551	2.48075E-05	1/ 40310
	Sure		0.03141	1857	8.32251E-07	1/ 1201560
total band EQ					2.89036E-05	1/ 34598

3.4 2100MHz band

The graph for the 2100MHz band activity around the site is shown below.

Figure 7 – 2100MHz band spectrum scan

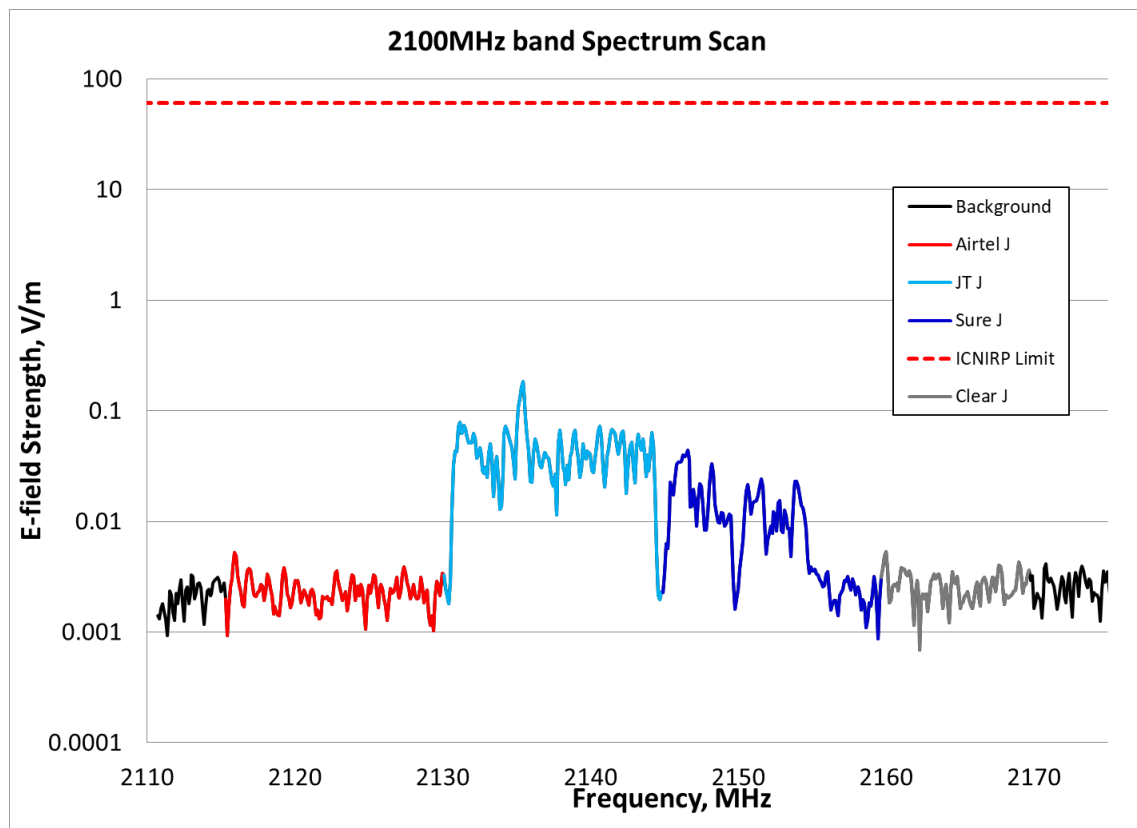

No field level recorded across the band was higher than 0.1846 V/m (JT), which is 330 times smaller than the ICNIRP Guideline Reference Level.

The EQ results for the 2100MHz band are shown below.


Table 5 – 2100MHz band exposure quotient at Mont Ube

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	Airtel	2100	0.005272	11571	1.18128E-07	1/ 8465379
	Clear		0.005326	11453	9.97945E-08	1/ 10020594
	JT		0.1846	330	5.11128E-05	1/ 19565
	Sure		0.04403	1385	4.15171E-06	1/ 240864
total band EQ					5.54825E-05	1/ 18024

3.5 2600MHz band

The graph for the 2600MHz band activity around the site is shown below.

Figure 8 – 2600MHz band spectrum scan

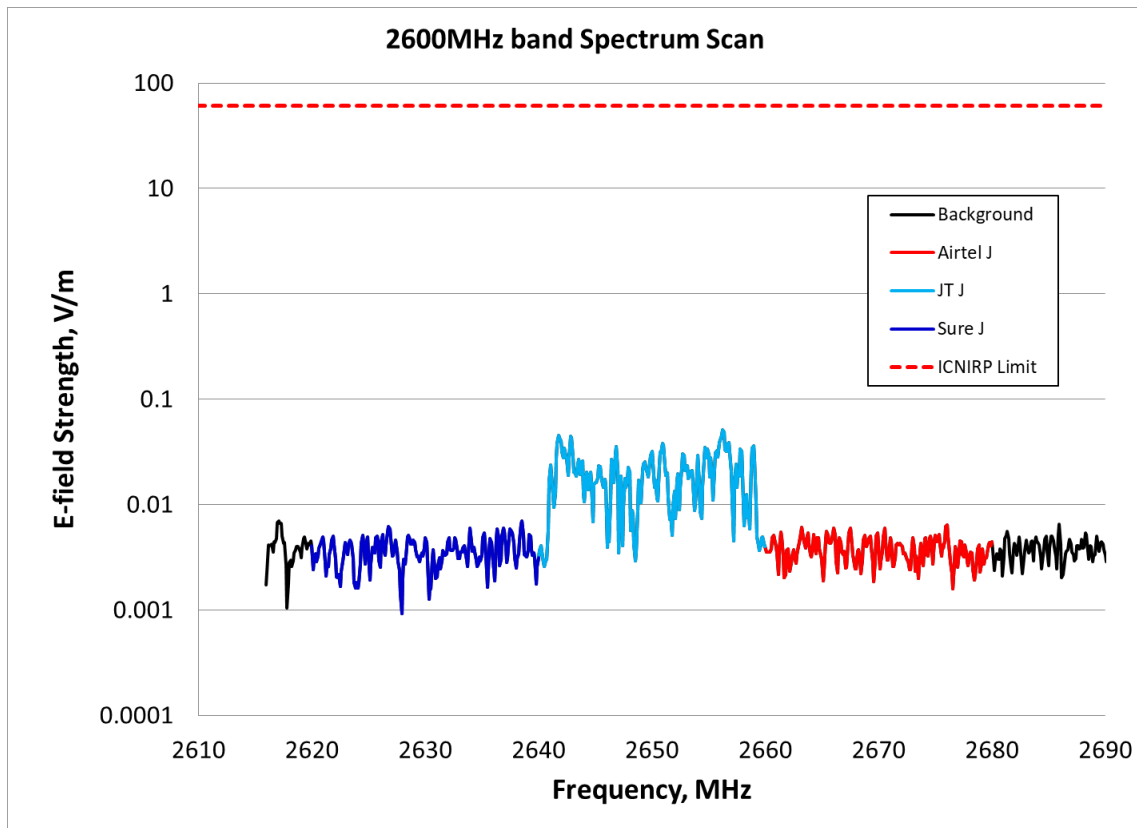

No field level recorded across the band was higher than 0.05167 V/m (JT), which is 1181 times smaller than the ICNIRP Guideline Reference Level.

The EQ results for the 2600MHz band are shown below.

Table 6 – 2600MHz band exposure quotient at Mont Ube

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Mont Ube	Airtel	2600	0.006475	9421	3.98087E-07	1/ 2512013
	JT		0.05167	1181	1.27537E-05	1/ 78409
	Sure		0.007026	8682	3.74531E-07	1/ 2670004
total band EQ					1.35263E-05	1/ 73930

END