

Cellular mast emissions survey: Quenault and Sons



Document details

Document name	Cellular mast emissions survey:	Quenault and Sons
Survey date	18-09-2025 at 12:56	
Report issue date	13-10-2025	
Survey engineer	Aleem Alvi	
Report compiled by	Sonia Khan	
Reviewed and approved by	Bachir Belloul	

©Freshwave Services Limited 2025. Confidential and Proprietary. This document and any information contained therein are intended for the use of employees and customers of Freshwave Services Limited only. No part of this document may be reproduced or transmitted to a third party in any form or means without the prior written consent of Freshwave Services Limited.

Contents page

1	Executive summary	3
2	Site details	4
2.1	Site location	4
2.2	Site description	4
2.3	Site photo	5
2.4	Test location	5
3	Survey results	6
3.1	700MHz band	6
3.2	800MHz band	7
3.3	900MHz band	8
3.4	1800MHz band	9
3.5	2100MHz band	10
3.6	2600MHz band	11
3.7	3400MHz band	12

Lists of figures

Figure 1 – Map of the site area	4
Figure 2 – Location of the peak where emission levels were measured	5
Figure 3 – Survey area with spot measurement markers	5
Figure 4 – 700MHz band spectrum scan	6
Figure 5 – 800MHz band spectrum scan	7
Figure 6 – 900MHz band spectrum scan	8
Figure 7 – 1800MHz spectrum scan	9
Figure 8 – 2100MHz band spectrum scan	10
Figure 9 – 2600MHz band spectrum scan	11
Figure 10 – 3400MHz band spectrum scan	12

List of tables

Table 1 – Total EQ by frequency band	3
Table 2 – 700MHz band exposure quotient at Quenault and Sons	6
Table 3 – 800MHz band exposure quotient at Quenault and Sons	7
Table 4 – 900MHz band exposure quotient at Quenault and Sons	8
Table 5 – 1800MHz band exposure quotient at Quenault and Sons	9
Table 6 – 2100MHz band exposure quotient at Quenault and Sons	10
Table 7 – 2600MHz band exposure quotient at Quenault and Sons	11
Table 8 – 3400MHz band exposure quotient at Quenault and Sons	12

1 Executive summary

The Jersey Competition and Regulatory Authority or JCRA regularly monitors emission levels from the cellular masts in Jersey¹ to ensure the mobile network operators who operate their services from those masts comply with their license obligations in terms of power levels and that the levels from the sites meet the internationally recognised standards and guidelines regarding health and safety limits for the public.

In 2017, the JCRA commissioned surveys to measure the electromagnetic field (EMF) emission levels at all the sites hosting mobile telecommunication equipment within the island. Further surveys have been conducted in each subsequent year focussing on new sites, those where significant changes have been made by the operators or those where the public have raised concerns to the JCRA in the previous year. This report presents the results of the survey conducted at the Quenault and Sons site in 2025.

In 2025, the Jersey mobile network operators have launched their first commercial 5G services. This year's audits therefore include the frequency bands used for 5G, noting however that not all sites currently have 5G transmitting equipment.

The Quenault and Sons site was used by a single operator at the time of the survey: Sure. Surveys were conducted at all cellular frequency bands (700, 800, 900, 1800, 2100, 2600 and 3400MHz) for all mobile cellular technologies (2G, 3G, 4G and 5G) and for all three cellular operators as a routine procedure. Even though the reported levels are expected to be predominantly emitted from this site, the test equipment does not discriminate between nearby sites which means that the levels are cumulated over all site emissions detected by the test instrument.

The survey established that the emission levels around the site were very low and well below the safety limits for the public advised by internationally recognised standards.

The values shown hereafter are the maximum levels recorded around the site following a peak search. The levels were found to be lower at all the other locations round this site. The recorded values are true at the time of testing and can go up or down depending on the level of user activity on the site.

The total Exposure Quotient (EQ) for the site recorded across all detected cellular frequency bands is given at the bottom of the summary table below. A total EQ close to 1 (one) for the site would mean that emission levels approach the safety limit advised by ICNIRP in their guidelines.

Table 1 – Total EQ by frequency band

Site Name	Band [MHz]	Max E-field in band [V/m]	Operator at Max E-field	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	700	0.006361	JT	6114	1.21682E-06	1/ 821813
	800	0.4559	Sure	85	0.002385371	1/ 419
	900	0.556	Sure	74	0.000486758	1/ 2054
	1800	0.2643	Sure	221	0.000261073	1/ 3830
	2100	0.3574	Sure	171	0.00053138	1/ 1882
	2600	0.00673	JT	9064	5.60245E-07	1/ 1784932
	3400	0.003865	Sure	10062	8.59603E-07	1/ 1163328
Total Site EQ					0.003667218	1/ 273

¹ Prior to 1 July 2020, the JCRA and the Guernsey Competition & Regulatory Authority coordinated their activities in the Channel Islands as the Channel Islands Competition Regulatory Authorities (CICRA). Earlier reports may refer to CICRA rather than JCRA.

The results show that the total EQ was measured at 0.366% of ICNIRP's *General Public* Reference Levels (or about 1/273) and the site therefore remains safe.

The graphs which follow show the activity on all the frequency bands surveyed. The plots are colour-coded for easy identification of the operator. On each plot, the solid red line represents the Airtel activity, the light blue is JT, the dark blue is Sure, the light grey is Clear (Clear only operates in the 2100MHz band) and the green line is Newtel (Newtel only operates a license in the 3400MHz band). Note however that not all operators are present in each frequency band but the colour assigned to each operator remains the same throughout.

ICNIRP's *General Public* Reference Level is also shown as the dashed line at the top of the graphs. For clarity, each step on the vertical axis represents a 10-fold increase. The same scaling and colour scheme will be used on the plots throughout this report.

The graphs are also supported by the equivalent statistical tables derived from the measured levels at the site for added clarity.

2 Site details

2.1 Site location

Figure 1 – Map of the site area



Site name:	Quenault and Sons
Site address:	Seawood, La Freminerie
Site latitude:	49.19003
Site longitude:	-2.07935

2.2 Site description

Operators:	Sure
Antenna types:	Directional Antenna
Approximate height:	12m
Site type:	Lattice Mast
Description:	The lattice mast at Quenault & Sons is located on the edge of the field next to the road where the public has access.


2.3 Site photo

Figure 2 – Location of the peak where emission levels were measured.



2.4 Test location

Figure 3 – Survey area with spot measurement markers

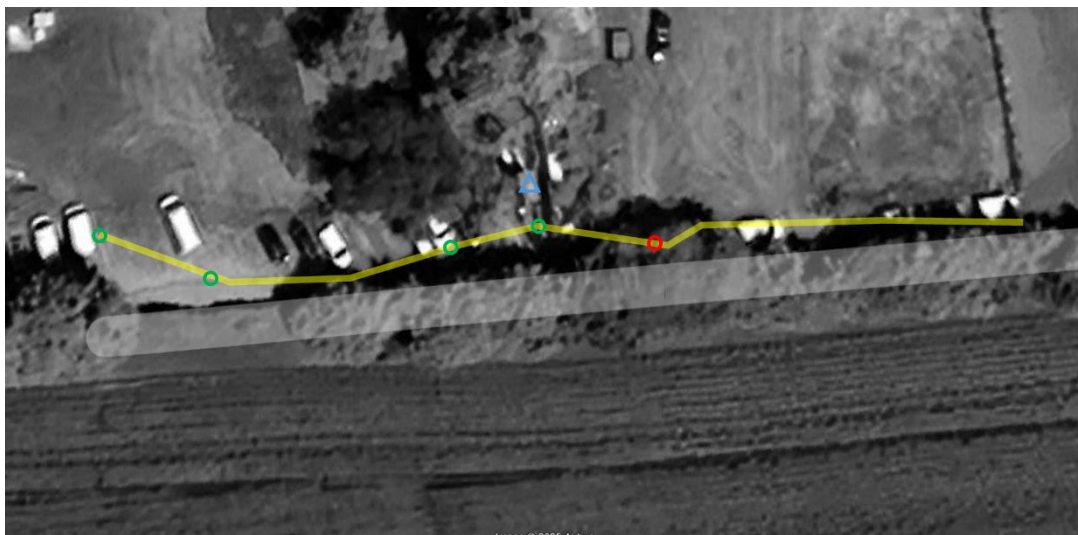

As part of the peak search procedure, spot measurements were taken at locations around the antennas as shown on the above sketch.

The blue triangle is the antenna location, yellow lines are the walk route, the green circles are intermediate locations measured at during the peak search and the red circle is the spot where the highest spot search reading was obtained and where the detailed survey was carried out.


The spectrum readings reported further down this report were recorded over a period of six minutes as advised by ICNIRP.

3 Survey results

3.1 700MHz band

The graph for the 700MHz activity is shown below with the E-field strength levels measured at the site plotted on a logarithmic scale.

Figure 4 – 700MHz band spectrum scan

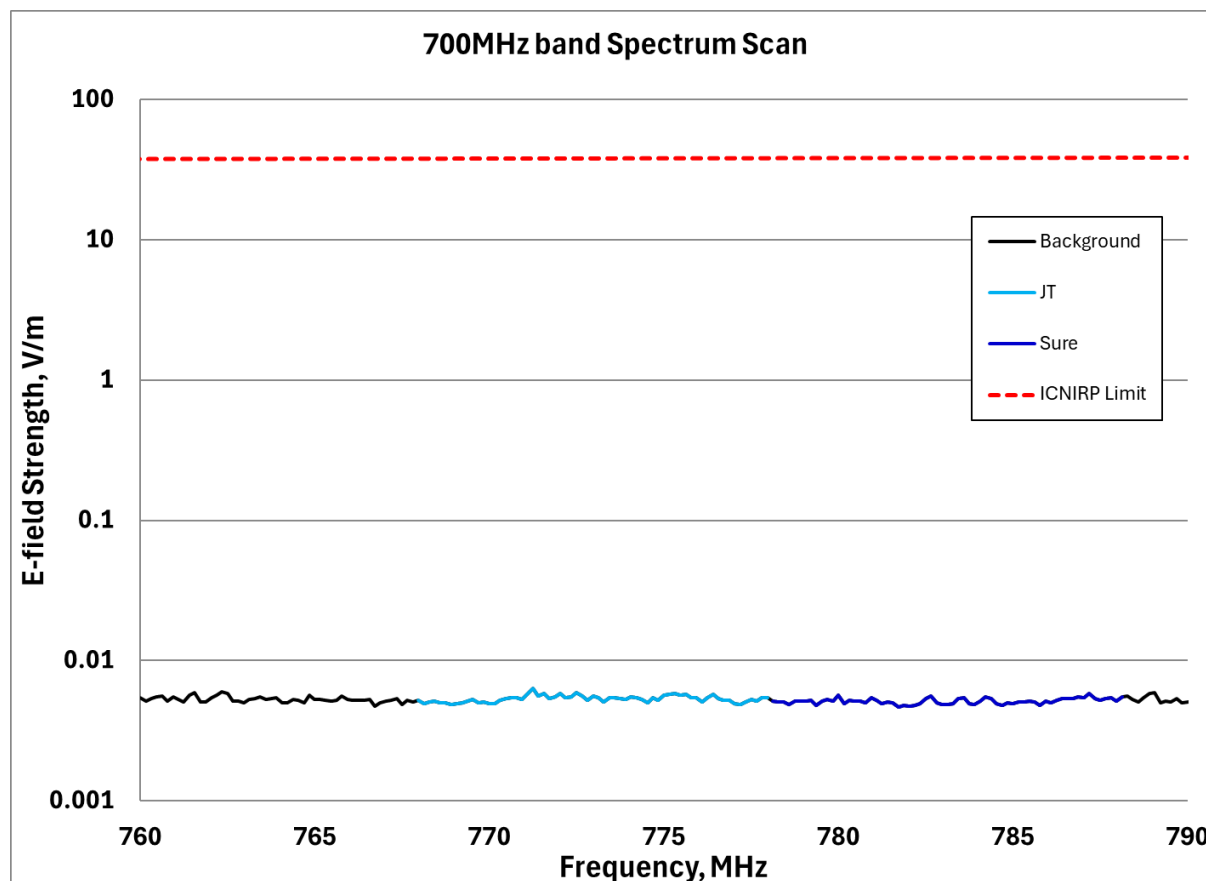

No meaningful activity was recorded at this site on the 700MHz band. The EQ results for the band are shown below.


Table 2 – 700MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	JT	700	0.006361	6114	6.36253E-07	1/ 1571702
	Sure		0.005834	6666	5.80569E-07	1/ 1722447
	total band EQ					1.21682E-06

3.2 800MHz band

The graph for the 800MHz activity is shown below.

Figure 5 – 800MHz band spectrum scan

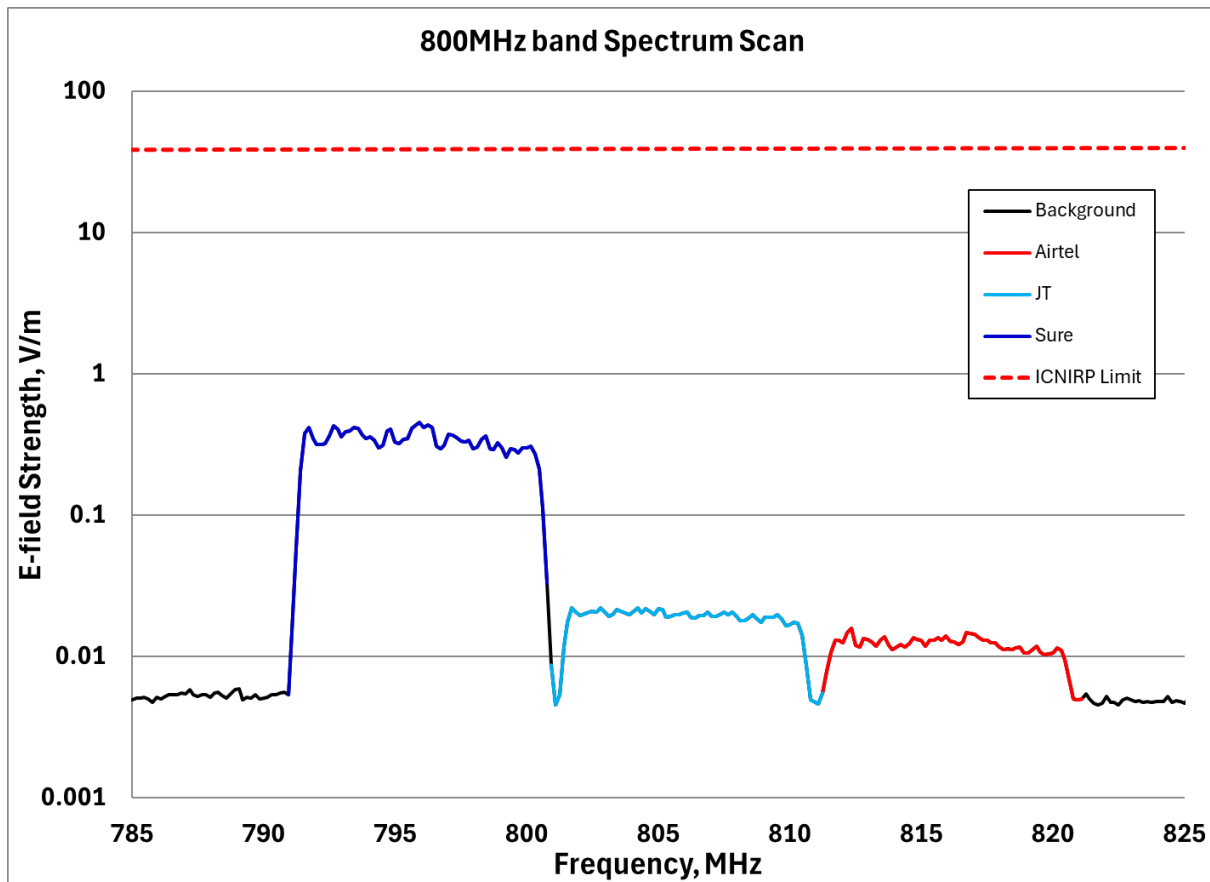

No field level recorded across the band was higher than 0.4559 V/m (Sure), which is 85 times smaller than the ICNIRP Reference Level.

The EQ results for the 800MHz band are shown below.


Table 3 – 800MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Airtel	800	0.01585	2454	2.96162E-06	1/ 337653
	JT		0.02212	1758	7.49857E-06	1/ 133359
	Sure		0.4559	85	0.00237491	1/ 421
total band EQ					0.002385371	1/ 419

3.3 900MHz band

The graph for the 900MHz activity is shown below.

Figure 6 – 900MHz band spectrum scan

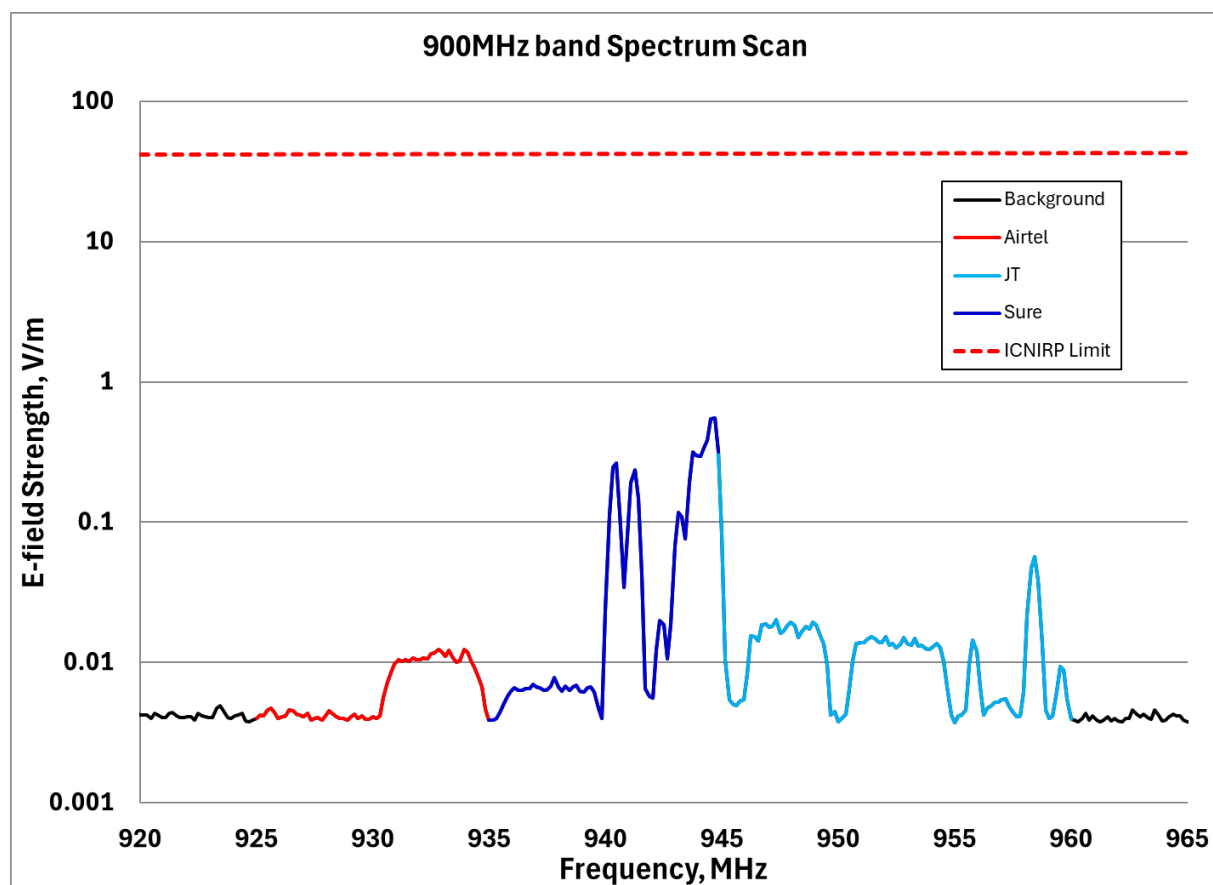

No field level recorded across the band was higher than 0.556 V/m (Sure), which is 74 times smaller than the ICNIRP Reference Level.

The EQ results for the 900MHz band are shown below.


Table 4 – 900MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Airtel	900	0.01247	3308	1.03337E-06	1/ 967711
	JT		0.3152	131	3.53356E-05	1/ 28300
	Sure		0.556	74	0.000450389	1/ 2220
total band EQ					0.000486758	1/ 2054

3.4 1800MHz band

The graph for the 1800MHz activity around the site is shown below.

Figure 7 – 1800MHz spectrum scan

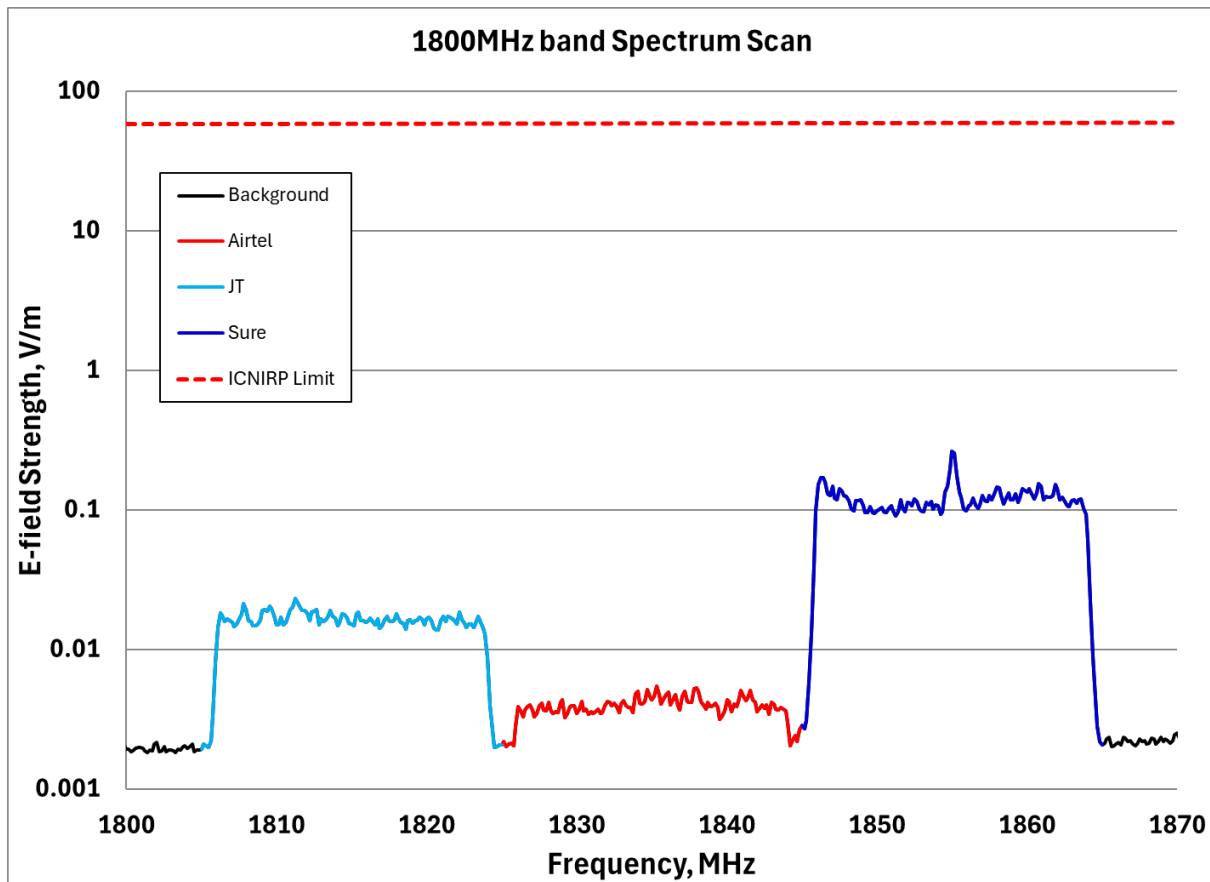

No field level recorded across the band was higher than 0.2643 V/m (Sure), which is 221 times smaller than the ICNIRP Reference Level.

The EQ results for the 1800MHz band are shown below.


Table 5 – 1800MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Airtel	1800	0.005419	10765	2.84141E-07	1/ 3519383
	JT		0.02303	2533	4.68451E-06	1/ 213469
	Sure		0.2643	221	0.000256104	1/ 3905
total band EQ					0.000261073	1/ 3830

3.5 2100MHz band

The graph for the 2100MHz band activity around the site is shown below.

Figure 8 – 2100MHz band spectrum scan

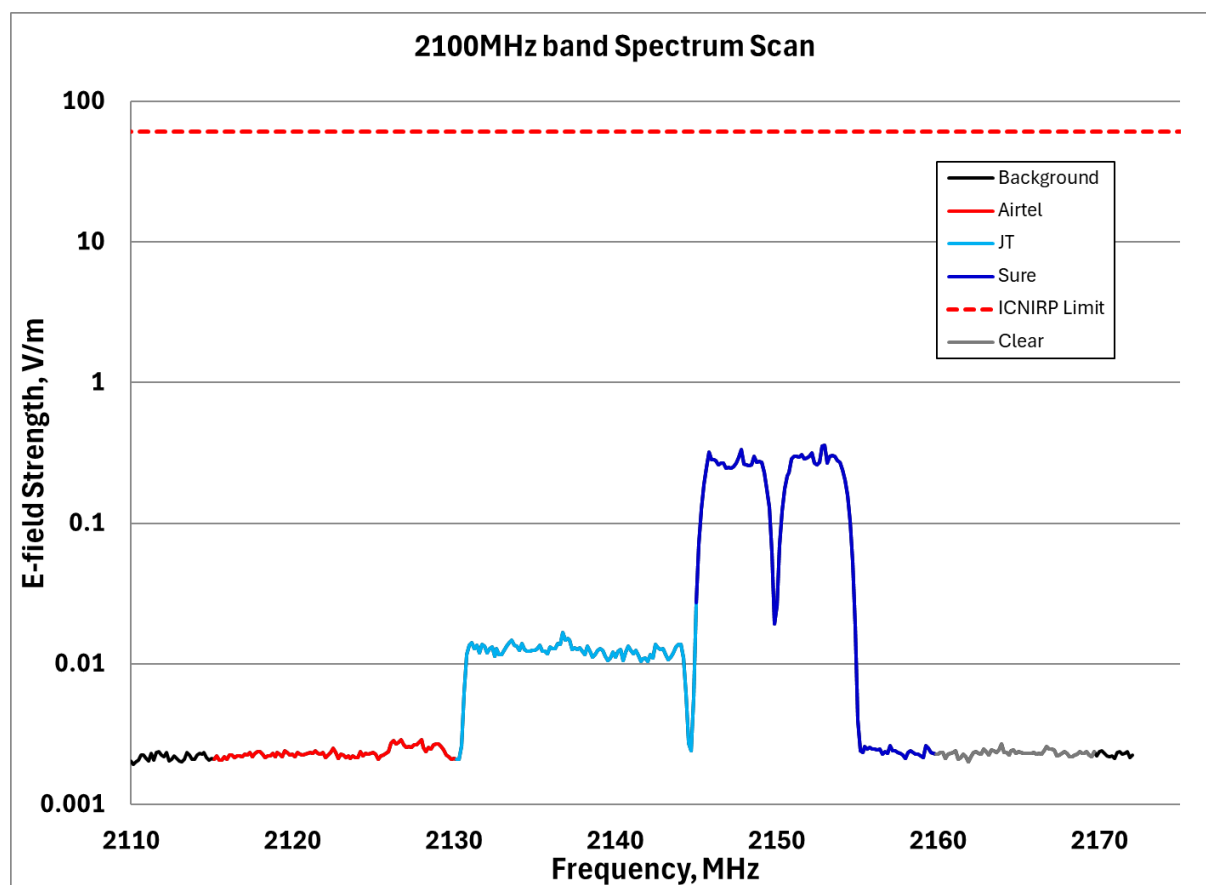

No field level recorded across the band was higher than 0.3574 V/m (Sure), which is 171 times smaller than the ICNIRP Reference Level.

The EQ results for the 2100MHz band are shown below.


Table 6 – 2100MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Airtel	2100	0.002908	20977	7.20122E-08	1/ 13886540
	Clear		0.002713	22484	4.6566E-08	1/ 21474874
	JT		0.02738	2228	1.98549E-06	1/ 503654
	Sure		0.3574	171	0.000529276	1/ 1889
total band EQ					0.00053138	1/ 1882

3.6 2600MHz band

The graph for the 2600MHz band activity around the site is shown below.

Figure 9 – 2600MHz band spectrum scan

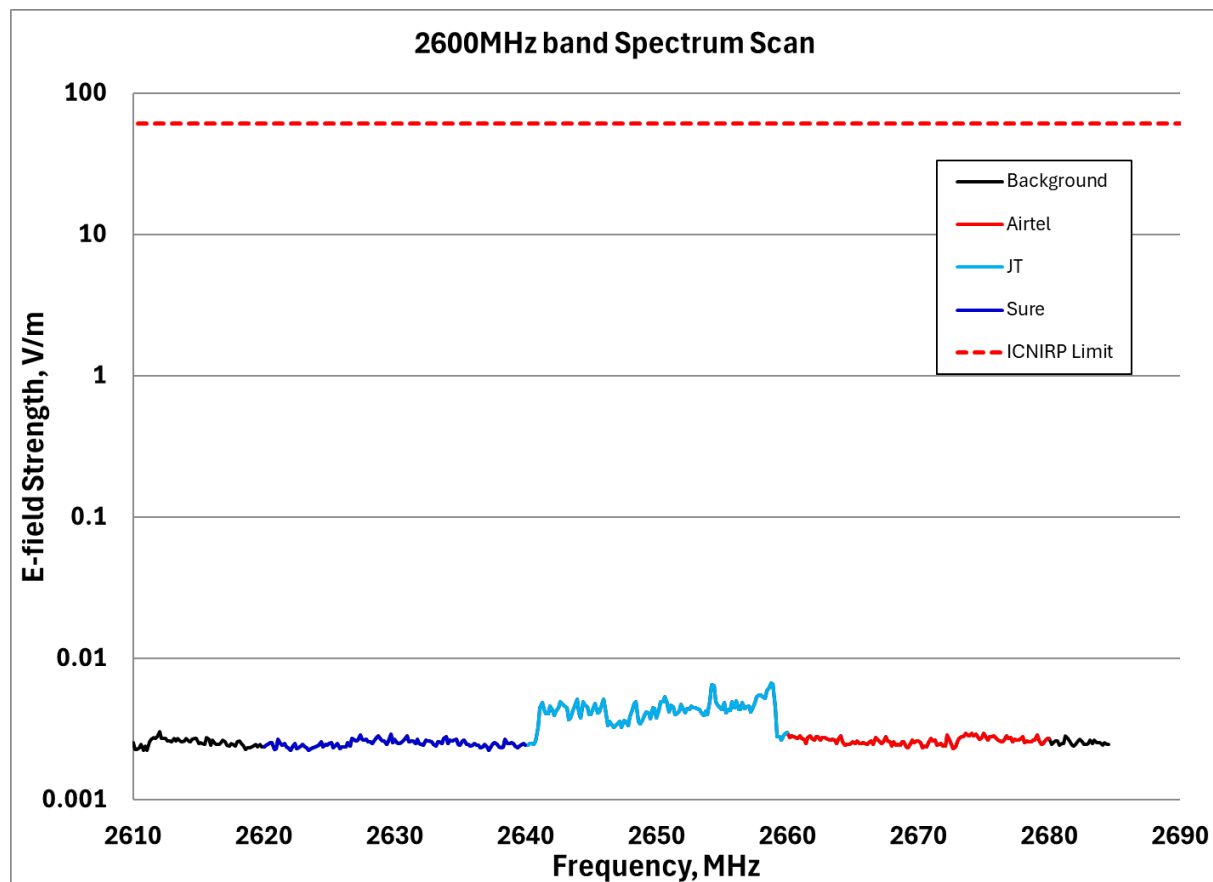

No field level recorded across the band was higher than 0.00673 V/m (JT), which is 9064 times smaller than the ICNIRP Reference Level.

The EQ results for the 2600MHz band are shown below.


Table 7 – 2600MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Airtel	2600	0.003009	20273	1.20917E-07	1/ 8270169
	JT		0.00673	9064	3.3027E-07	1/ 3027823
	Sure		0.0029	21034	1.09059E-07	1/ 9169381
total band EQ					5.60245E-07	1/ 1784932

3.7 3400MHz band

The graph for the 3400-3800MHz band activity around the site is shown below.

Figure 10 – 3400MHz band spectrum scan

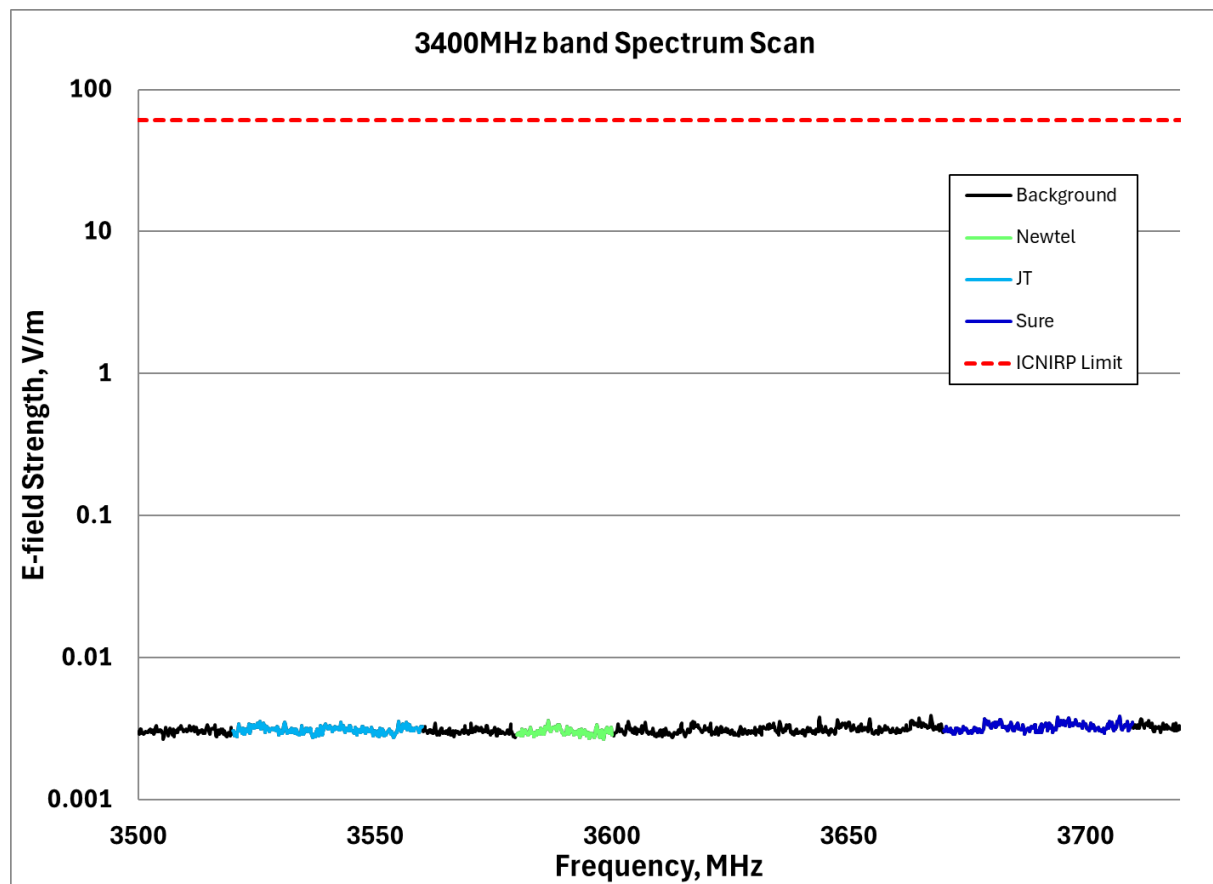

No meaningful activity was recorded at this site in the 3400MHz band. The EQ results for the band are shown below.

Table 8 – 3400MHz band exposure quotient at Quenault and Sons

Site Name	Operator	Band [MHz]	Max E-field Strength [V/m]	ICNIRP Limit Relative to Max E-field	Band Exposure Quotient	Band EQ Relative to ICNIRP
Quenault and Sons	Newtel	3400	0.003621	10740	1.58282E-07	1/ 6317821
	JT		0.003576	10876	3.34451E-07	1/ 2989978
	Sure		0.003865	10062	3.6687E-07	1/ 2725763
total band EQ					8.59603E-07	1/ 1163328

END